


Design and Development of Dielectric Resonator Antennas Using Glass Added Barium Strontium Titanate Ceramic Materials

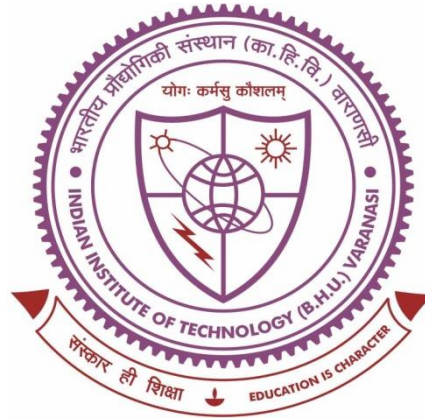

**Thesis submitted in partial fulfillment
for the Award of Degree**

Doctor of Philosophy

by

Pankaj Tripathi

**DEPARTMENT OF CERAMICS ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY
(BANARAS HINDU UNIVERSITY)
VARANASI – 221 005**

ROLL NO: 13031005

2019

CERTIFICATE

It is certified that the work contained in the thesis titled **“Design and Development of Dielectric Resonator Antennas Using Glass Added Barium Strontium Titanate Ceramic Materials”** by **“Pankaj Tripathi”** has been carried out under my supervision and that this work has not been submitted elsewhere for a degree.

It is further certified that the student has fulfilled all the requirements of Comprehensive Examination, Candidacy and SOTA for the award of Ph. D. Degree.

(Prof. Devendra Kumar)
Supervisor
Professor and Head
Department of Ceramic Engineering
Indian Institute of Technology (BHU)

(Prof. S. P. Singh)
Co-Supervisor
Professor
Department of Electronics Engineering
Indian Institute of Technology (BHU)

DECLARATION BY THE CANDIDATE

I, Pankaj Tripathi, certify that the work embodied in this Ph. D. thesis is my own bona fide work and carried out by me under the supervision of Prof. Devendra Kumar (Department of Ceramic Engineering) and Co-supervision of Prof. S. P. Singh (Department of Electronics Engineering) from **23rd July 2013** to **17th January 2019** at the Department of Ceramic Engineering, Indian Institute of Technology (Banaras Hindu University), Varanasi. The matter embodied in this thesis has not been submitted for the award of any other degree/diploma.

I declare that I have faithfully acknowledged and given credits to the research workers wherever their work has been cited in my work in this thesis. I further declare that I have not wilfully copied any other's work, paragraphs, text, data, results, etc., reported in journals, books, magazines, reports dissertations, theses, etc., or available at websites and have not included them in this thesis and have not cited as my own work.

Date :

Signature of the Student

Place :

(Pankaj Tripathi)

CERTIFICATE BY THE SUPERVISOR(S)

It is certified that the above statement made by the student is correct to the best of my knowledge.

(Prof. Devendra Kumar)

Supervisor

Professor and Head

Department of Ceramic Engineering
Indian Institute of Technology (BHU),
Varanasi- 221005

(Prof. S. P. Singh)

Co-supervisor

Professor

Department of Electronics Engineering
Indian Institute of Technology (BHU),
Varanasi- 221005

Signature of Head of Department

“SEAL OF THE DEPARTMENT”

COPYRIGHT TRANSFER CERTIFICATE

Title of the Thesis: **Design and Development of Dielectric Resonator
Antennas Using Glass Added Barium Strontium
Titanate Ceramic Materials**

Name of the Student: **Pankaj Tripathi**

Copyright Transfer

**The undersigned hereby assigns to the Indian Institute of Technology (Banaras
Hindu University) Varanasi all rights under copyright that may exist in and for the
above thesis submitted for the award of the Doctor of Philosophy.**

Date :

Signature of the Student

Place :

Pankaj Tripathi

**Note: However, the author may reproduce or authorize others to reproduce material
extracted verbatim from the thesis or derivative of the thesis for author's personal
use provided that the source and the Institute's copyright notices are indicated.**

ACKNOWLEDGEMENTS

It is a privilege for me in submitting my thesis in the “ Tapobhoomi” of Pt. Madan Mohan Malviya. I am not alone in this journey to accomplish this Herculean task in the garden of “ Baba Vishwanath and Maa Annapurna”. Without the blessing of Lord Shiva, Lord Vishnu, Maa Annapurna and my spiritual Guru (Param Pujya Shri 1008 Jagadacharaya Shrimad Vishwaksenacharaya Shri Tridandi Swami and his disciples Puram Pujya Sri Laxmi Prapanna Jeeyar Swami) it would have not been easy to achive this milestone of my life. Many hands held the oars during my “sail” through the troubled water that come across my way and it is my pleasure to acknowledge all such supports.

First and Foremost, I would like to express my immense gratitude and indebtness to my respected supervisor Prof. Devendra Kumar for his sagacious guidance, encouragement and valuable time. I am fortunate enough to done my Ph.D. study under such a great person with deep knowledge, patience, discipline, generosity and truthfulness. It has been a great privilege to work under his able guidance. Without his guidance as a great mentor, this work would not have been possible. I owe my heartiest sense of obligation to my co-supervisor Prof. S.P.Singh for his consistent support, encouragement and invaluable suggestions throughout my research . His extensive experience, immense knowledge, and expertise in the field of Microwaves, have been extremely helpful in solving various technical problems through all phases of this research. The completion of this research work is truly an outcome of his constant untiring support, valuable ideas and suggestions during my research work. The insightful discussions with him always provided me great enthusiasm.

I am also thankful to other members of my research progress evaluation committee (RPEC) Prof. Ram Pyare and Prof. Pralay Maiti for their whole hearted support in completing my thesis work. I would also like to thanks all faculty members of the Ceramic and Electronic Engineering Department for their endless suggestions, co-operation, and academic guidance. I would like to thanks Prof. Rajeev Prakash, In-Charge, Central Instrument Facility Centre and his team members for providing all the characterization facilities on time with precision, without which the completion of this work was not possible. I would also like to sincerely thank Prof. Sandip Chatterjee for Low temperature dielectric measurement and Dr. Shail Upadhyay for DTA/TG measurements.

I would also like to mention my deep regards and sincere thanks to Dr. Preeti Kumari for her consistent support, cooperation and fruitful discussions during experimental times. I heartily thank for her encouragement, motivation, guidance and more over her timely support till the submission of my Ph.D. thesis. Collaboration with her in a part of the work reported in the thesis is gratefully acknowledged. Without her support I was unable to complete my Ph.D.

I feel short of words to express my appreciation, gratitude and indebtedness to Dr. Rahul Singh for his support as elder brother and support me at every step of my academic and personal life. Further, I would not forget to remember my special thanks to Mr. Bhagirath Sahu for making me familiar with the HFSS software and cooperated while antenna fabrication and measurement and for making my life with full of joyness and experiences for whole life.

Now, it's time to thank seniors, my dear fellow colleagues and juniors at IIT (BHU) namely Dr. Aditya Singh, Dr. Vijay Mishra, Dr. Shreevats, Mr. B.N. Bhattacharjee, Dr. Pallav Gupta, Dr Nandani Jaiswal. Dr. Manoj Gupta, Dr. Sitashree Banerjee. Dr. Harish Kumar, Mr. Md. Ershad, Dr. Niraj Singh Mehta, Dr. Kumar Saurav, Mr. Param Srivastava, Mr. Sukhdev Pandey Ms. Deepshikha Shekhawat, Dr. Neera Singh, Mr. Prem Prakash, Mr. Khagesh Tanwar, Mr. Deepankar for their nice company during my stay at the institute. I thank all my beloved friends across the globe for sharing my happy and sorrow moments at all times.

I would like to sincerely thank to Technical staff at Ceramic Department namely Mr. Ashish Tripathi, Mr. B. Singh, Mr. I. A. Khan, Mr. Jayram, (Microwave Lab), Mr. Shailendra, Mr. Pawan Kumar, Mr. Pankaj Singh and all the technical and non-technical staff in office and library of the Ceramic and Electronic Department for their help all the times whenever I required.

There are no words to explain the support from my lovely and caring father "Late Shree Lallan Tiwari" . It's my gratitude to not to forget their hard work and struggle throughout my life. Without his love and help it would be difficult for me to stand up to this height. My Ph.D is the outcome of my father's dream. Success is not possible without the blessings of my mother Smt. Javitri Devi and respected grand-parents (Late Shree Rajbali Tiwari and Smt. Hubraji Devi). I would also sincerely express my gratitude to Mr. Gaya Prasad Tiwari (Uncle), Mr. Rajesh Pandey, Mrs. Mamta Tiwari (Aunty), Mrs. Pushpa Devi, my younger brother Mr. Ashutosh, elder sister (Mrs. Manisha Tripathi) and all my loving family

members for their encouragement and immense patience during my studies. The source of happiness is always from my family and I pray to the Almighty for their wellness and growth in a good manner.

It is my heartiest acknowledge towards my beloved wife Mrs. Shweta Tripathi who has always been the source of inspiration to pursue the Ph.D degree and my loving son Shaswat Tripathi whose smiles always gave energy to me. Last, but not the least, I acknowledge my parents in law Smt. Sushila Mishra and Sri Shiv Shankar Mishra for their blessing and encouragement.

I would like to express my sincere gratitude to the persons who have supported me in all the sense during this journey and given invaluable help in their own way.

Date :

Place : Varanasi

(Pankaj Tripathi)

***Dedicated
To
My Beloved Father***



Late Shri Lallan Tiwari

CONTENTS		PAGE NO.
<i>List of Figures</i>		xiv-xvii
<i>List of Tables</i>		xviii-xix
<i>List of Abbreviations</i>		xx-xxi
<i>Preface</i>		xxii-xxviii
CHAPTER 1		01-35
INTRODUCTION AND LITERATURE REVIEW		
1.1	Brief History of DRAs	01
1.2	Important DRA parameters	02
1.2.1	Return loss	02
1.2.2	Frequency bandwidth	03
1.2.3	Bandwidth enhancement techniques for DRAs	04
1.2.4	Radiation pattern	07
1.2.5	Gain	11
1.2.6	Gain enhancement techniques for DRAs	11
1.3	Excitation of DRAs	12
1.3.1	Coaxial probe feed	12
1.3.2	Microstrip line feed	13
1.3.3	Aperture coupled feed	13
1.3.4	Coplanar waveguide feed	14
1.3.5	Dielectric image guide coupling feed	14
1.4	Modes of Excitation	14
1.5	Dielectric Materials and their Properties	16
1.5.1	Parameters of ceramic dielectric materials affecting the performance of DRAs	16
1.5.2	Parameters affecting the dielectric constant of the resonator	18
1.5.3	Effect of interaction of radio-frequency field with dielectric materials	19
1.5.4	Laboratory synthesized and commercially available dielectric materials	22
1.6	Recent Developments Pertaining to DRAs	24
1.7	Perovskite Ceramics	28
1.8	Liquid Phase Sintering	33
CHAPTER 2		37-41
OBJECTIVES OF THE WORK		
2.1	Motivation and Problem Definition	37

2.2	Objective of Proposed Research Work	39
2.2.1	Material preparation and characterization	40
2.2.2	Design, simulation and experimental studies	40
CHAPTER 3		43-57
EXPERIMENTAL METHODS		
3.1	Material Synthesis	43
3.1.1	Raw materials	43
3.1.2	Preparation of BST ceramics	43
3.1.3	Preparation of different glasses	44
3.1.4	Liquid phase sintering of barium strontium titanate	45
3.2	Material Characterisation	47
3.2.1	Thermo-gravimetric (TG) and Differential thermal analysis (DTA)	47
3.2.2	Phase analysis and rietveld refinement	48
3.2.3	Microstructure analysis	49
3.2.4	Density	49
3.2.5	Dielectric measurements	50
3.3	Design and Simulation of DRAs	51
3.4	DRA Fabrication	53
3.4.1	Requirement	53
3.4.2	Fabrication steps	53
3.5	Antenna Measurement	57
CHAPTER 4		59-80
STUDY OF THE EFFECTS OF PBO-B₂O₃-BaO-SiO₂ (PBBS) GLASS ADDITIVE ON STRUCTURAL AND DIELECTRIC BEHAVIOURS OF Ba_{0.5}Sr_{0.5}TiO₃ CERAMICS		
4.1	Introduction	59
4.2	Results and Discussion	60
4.2.1	Thermo-gravimetric and differential thermal analysis	61
4.2.2	Sintering and densification behaviour	63
4.2.3	Phase analysis	65
4.2.4	Microstructure	68
4.2.5	Analysis of dielectric property	70
4.3	Summary	80
CHAPTER 5		81-97
DESIGN AND DEVELOPMENT OF FILLETED RECTANGULAR DIELECTRIC RESONATOR ANTENNA USING PBBS GLASS ADDED BST (BST-3P)		
5.1	Introduction	81

5.2	Antenna Design and Discussion	83
5.2.1	Feeding mechanism	83
5.2.2	Stacking of resonating elements	84
5.2.3	Structural novelty in DRA	84
5.2.4	Theoretical analysis of antenna design	85
5.3	Results and Discussion	87
5.3.1	Reflection coefficient-frequency characteristics	87
5.3.2	Mode analysis	90
5.3.3	Radiation patterns and gain of the proposed antenna	93
5.4	Summary	96
CHAPTER 6		99-118
STUDY OF THE EFFECTS OF B₂O₃-Bi₂O₃ (BB) GLASS ADDITIVE ON STRUCTURAL AND DIELECTRIC BEHAVIOURS OF Ba_{0.5}Sr_{0.5}TiO₃ CERAMICS		
6.1	Introduction	99
6.2	Results and Discussion	101
6.2.1.	Thermo-gravimetric and differential thermal analysis	101
6.2.2.	Sintering and densification behaviour	103
6.2.3.	Phase analysis	104
6.2.4.	Microstructure	106
6.2.5.	Analysis of dielectric property	108
6.3	Summary	118
CHAPTER 7		119-135
DESIGN AND DEVELOPMENT OF CYLINDRICAL DIELECTRIC RESONATOR ANTENNA USING BB GLASS ADDED BST (BST-3B) EXCITED BY NOVEL COMPOSITE FEED		
7.1	Introduction	119
7.2	Antenna Design and Discussion	120
7.3	Results and Discussion	126
7.3.1	Reflection coefficient – frequency characteristic	126
7.3.2	Mode analysis	127
7.3.3	Radiation patterns and gain of the proposed antenna	130
7.4	Summary	134
CHAPTER 8		137-142
CONCLUSION AND FUTURE SCOPE		
8.1	Summary and Conclusion	137
8.2	Future Scope	142

References	143-158
List of Publications	159

LIST OF FIGURES

Figure 1.1	Different types of DRA configurations providing improved bandwidth	6
Figure 1.2	Different complex multi-element DRAs generating monopole like radiation pattern	9-10
Figure 1.3	Perovskite structure	29
Figure 1.4	Polyhedra model of perovskite structure	29
Figure 2.1	Layout of present investigation	38
Figure 2.2	The objective of the work (Flow chart)	39
Figure 3.1	Flow chart showing liquid phase sintering of BST ceramic using PBBS glass	46
Figure 3.2	Flow chart showing liquid phase sintering of BST ceramic using BB glass	47
Figure 3.3	Microwave dielectric measurement of the sample using Network Analyser	50
Figure 3.4	Depiction of mesh on the FR4 substrate of the composite feed CDRA using HFSS software	51
Figure 3.5	Design procedure used for antenna simulation using HFSS software	52
Figure 3.6	3D geometry of (a) Fillet RDRA and (b) composite feed CDRA	55
Figure 3.7	Measurement of reflection coefficient (S_{11}) – frequency characteristic of the fabricated prototype of DRA through Network Analyser	56
Figure 3.8	Experimental setup for measurement of radiation characteristics of the fabricated prototype of DRA.	56
Figure 4.1	(a) DTA/TGA of $Ba_{0.5}Sr_{0.5}TiO_3$ and (b) DTA of PBBS glass.	62
Figure 4.2	Variation of density with sintering temperature of samples BST, BST-3P, BST-5P, BST-8P and BST-10P.	64
Figure 4.3(a)	XRD pattern of calcined $Ba_{0.5}Sr_{0.5}TiO_3$ powder sample.	65

Figure 4.3(b)	XRD pattern of $Ba_{0.5}Sr_{0.5}TiO_3$ sintered at 1523K	66
Figure 4.3(c)	Comparative XRD analysis of different sample BST, BST-3P, BST-5P, BST-8P and BST-10P sintered at 1523K, 1223K, 1198K, 1173K and 1148K, respectively	67
Figure 4.4	SEM microstructure of (a) BST, (b) BST-3P, (c) BST-5P, (d) BST-8P and (e) BST-10P	69
Figure 4.5	Variation of dielectric constant and loss tangent with temperature within the temperature range of 20K to 293K at different frequencies for the ceramic samples: (a) BST, (b) BST-3P, (c) BST-5P, (d) BST-8P and (e) BST-10P	71-73
Figure 4.6	Variation of dielectric constant and loss tangent with temperature within the temperature range of 293K to 450K at different frequencies for the ceramic samples: (a) BST, (b) BST-3P, (c) BST-5P, (d) BST-8P and (e) BST-10P	74-76
Figure 4.7	Variation of dielectric constant with temperature of different ceramic samples at 1 MHz at (a) 20 to 293K and (b) 293K to 450K.	77
Figure 4.8	Variation of (a) dielectric constant and (b) Loss tangent of different ceramic samples with frequencies in GHz range	79
Figure 5.1	Geometry of DS-RDRA (a) 3-D view, (b) bottom view	86
Figure 5.2	Geometry of F-RDRA (a) 3-D view, (b) Fabricated F-RDRA	86
Figure 5.3	(a) Simulated variations of reflection coefficient of SS-RDRA, DS-RDRA and the proposed F-RDRA versus frequency; (b) Effect of variation in fillet radius over the range 4.5 - 6.5 mm on the reflection coefficient of F-RDRA and (c) Simulated and measured variations of reflection coefficient of F-RDRA with frequency.	88
Figure 5.4	E-field distribution of SS-RDRA at 11.32 GHz	91
Figure 5.5	E-field distributions in DS-RDRA of (a) upper segment, and (b) lower segment at 8.68 GHz	92
Figure 5.6	E-field distributions in F-RDRA of (a) upper segment, and (b) lower segment at 9.4 GHz.	92
Figure 5.7	Simulated 3D radiation pattern of (a) Conventional DS-RDRA at 9.42 GHz; (b) Conventional DS-RDRA at 11.99 GHz; (c) F-RDRA at 9.42 GHz and (d) F-RDRA at 11.99 GHz.	94
Figure 5.8	Simulated far field radiation pattern of conventional DS-RDRA and F-RDRA in H-plane at: (a) 9.42 GHz; (b) 11.99 GHz	94

Figure 5.9	Far field radiation patterns of F-RDRA in :(a) E-plane at 7.62 GHz; (b) H-plane at 7.62 GHz; (c) E-plane at 12.3 GHz, and (d) H-plane at 12.3 GHz	95
Figure 5.10	Simulated and measured gain values of F-RDRA over its operating frequency range.	95
Figure 6.1	DTA/TGA of BB glass	102
Figure 6.2	Variations of density of BST, BST-3B, BST-5B, BST-8B and BST-10B samples with sintering temperature.	104
Figure 6.3	Comparative XRD analysis of BST, BST-3B, BST-5B, BST-8B and BST-10B samples sintered at 1223K.	105
Figure 6.4	SEM microstructure of (a) BST, (b) BST-3B, (c) BST-5B, (d) BST-8B and (e) BST-10B	107
Figure 6.5	Variation of dielectric constant and loss tangent with temperature within the temperature range of 20K to 293K at different frequencies for the ceramic samples: (a) BST, (b) BST-3B, (c) BST-5B, (d) BST-8B and (e) BST-10B	110-112
Figure 6.6	Variation of dielectric constant and loss tangent with temperature within the temperature range of 293K to 500K at different frequencies for the ceramic samples: : (a) BST, (b) BST-3B, (c) BST-5B, (d) BST-8B and (e) BST-10B	113-115
Figure 6.7	Variations of dielectric constant for different ceramic samples at 1 MHz in the temperature range (a) 20 - 293K and (b) 293K - 450K.	116
Figure 6.8	Variations of (a) Dielectric constant, and (b) Loss tangent of different ceramic samples with frequency in GHz range	117
Figure 7.1	Geometry of proposed antenna (a) 3-D view (b) Side view	121
Figure 7.2	Different feed configurations for CDRA (a) Feed 1 (PPP), (b) Feed 2 (PSP), and (c) Feed 3 (PXP)	121
Figure 7.3	Simulated reflection coefficient-frequency characteristics of CDRA excited by three different feed configurations	123
Figure 7.4	Simulated reflection coefficient-frequency characteristics of the proposed CDRA excited by feed 3 (a) for different ' r_d ' values by keeping $w_f=0.7$ mm and (b) for different ' w_f ' values by keeping $r_d = 4.7$ mm.	123
Figure 7.5	Image of fabricated antenna (a) Front side showing XOR patch	126

	(b) Bottom side (c) Image of the fabricated CDRA	
Figure 7.6	Reflection coefficient – frequency characteristics of the proposed antenna	127
Figure 7.7	The E field distributions in the printed patches at their resonant frequencies for (a) Feed 1 (b) Feed 2 (c) Feed 3	128
Figure 7.8	The E field distributions in the printed patch of proposed antenna at (a) 7.78 GHz (b) 9.5 GHz (c) 10.5 GHz	128
Figure 7.9	The E field distributions in the CDRA at corresponding resonant frequency for (a) Feed 1 (b) Feed 2 (c) Feed 3	129
Figure 7.10	Radiation patterns of the proposed CDRA at (a) 7.44 GHz (in x-z plane); (b) 7.44 GHz (in y-z plane); (c) 7.44 GHz (in x-y plane); (d) 7.78 GHz (in x-z plane); (e) 7.78 GHz (in y-z plane); (f) 7.78 GHz (in x-y plane); (g) 8.30 GHz (in x-z plane); (h) 8.30 GHz (in y-z plane) and (i) 8.30 GHz (in x-y plane).	131
Figure 7.11	Radiation patterns of the proposed CDRA at (a) 9.50 GHz (in x-z plane); (b) 9.50 GHz (in y-z plane); (c) 9.50 GHz (in x-y plane); (d) 10.50 GHz (in x-z plane); (e) 10.50 GHz (in y-z plane); (f) 10.50 GHz (in x-y plane); (g) 11.25 GHz (in x-z plane); (h) 11.25 GHz (in y-z plane) and (i) 11.25 GHz (in x-y plane).	132
Figure 7.12	3D gain plots at different frequencies within the operating frequency range of the proposed CDRA.	133

LIST OF TABLES

Table 1.1	Modes of excitation in different shapes of DRA	15
Table 1.2	Commercially available dielectric materials for DRA applications	23
Table 1.3	Recently designed DRAs with commercially available and synthesized ceramic materials.	25
Table 3.1	The list of raw materials with percentage purity and names of manufacturers.	43
Table 3.2	Calculation of batch composition for BST ($\text{Ba}_{0.5}\text{Sr}_{0.5}\text{TiO}_3$)	44
Table 3.3	Calculation of batch composition for PBBS glass	44
Table 3.4	Calculation of batch composition for BB glass	45
Table 3.5	Different BST-PBBS batch compositions.	45
Table 3.6	Different BST-BB batch compositions	46
Table 4.1	Nomenclature of different BST-PBBS batch compositions	60
Table 4.2	The maximum relative percentage densities for different compositions	64
Table 4.3	Wyckoff position and crystallographic details of BST	66
Table 4.4	Dielectric properties of BST ceramic compositions and PBBS glass (8.5 – 11GHz)	78
Table 5.1	Parameters of SS-RDRA, DS-RDRA and proposed F-RDRA	87
Table 5.2	Reflection coefficient–frequency characteristics of SS-RDRA, conventional DS-RDRA and F-RDRA	88
Table 5.3	Simulation results of the conventional DS-RDRA and the proposed F-RDRA	89
Table 5.4	Parameters of DS-RDRA and proposed F-RDRA for theoretical analysis of antenna design	89
Table 5.5	Performance comparison of proposed antenna with other antennas reported in literature.	90
Table 6.1	Nomenclature of different BST-BB batch compositions	101
Table 6.2	The maximum relative percentage densities for different compositions	104
Table 6.3	Dielectric properties of BST ceramic and BB glass added BST	116

	compositions within the frequency range (8.5 – 12 GHz)	
Table 7.1	Optimized design parameters of proposed CDRA	122
Table 7.2	-10 dB reflection coefficient bandwidth and resonating frequency of the antenna for different feed configurations	123
Table 7.3	-10 dB reflection coefficient bandwidth and resonating frequency of the antenna for different r_d values	124
Table 7.4	-10 dB reflection coefficient bandwidth and resonating frequency of the antenna for different ' w_f ' values by keeping $r_d = 4.7$ mm	124
Table 7.5		133
	Comparison of the performance of the proposed antenna with other antennas reported in literature.	
Table 8.1	Comparison of properties of BST ceramic, PBBS and BB glass added BST ceramics	138
Table 8.2	Performance comparison of proposed F-RDRA with other antennas reported in literature.	140
Table 8.3	Performance comparison of the proposed CDRA with other antennas reported in literature	140
Table 8.4	Comparison of results for various parameters of proposed DRAs	141

LIST OF ABBREVIATIONS

AUT	Antenna Under Test
BSG	Borosilicate glass
BW	Bandwidth
BST	$\text{Ba}_{0.5}\text{Sr}_{0.5}\text{TiO}_3$
BB	$\text{B}_2\text{O}_3\text{-Bi}_2\text{O}_3$
CBS	$\text{CaO-B}_2\text{O}_3\text{-SiO}_2$
CDR	Cylindrical Dielectric Resonator
CDRA	Cylindrical Dielectric Resonator Antenna
CTE	Coefficient of Thermal Expansion
CZN	$\text{Cu}_2\text{ZnNb}_2\text{O}_8$
DR	Dielectric Resonator
DRA	Dielectric Resonator Antenna
DS-CDRA	Dual Segment Cylindrical Dielectric Resonator Antenna
DS-RDRA	Dual Segment Rectangular Dielectric Resonator Antenna
DTA	Differential Thermal Analysis
FDTD	Finite Difference Time Domain
FRDRA	Filletted Rectangular Dielectric Resonator Antenna
FEM	Finite Element Method
FR-4	Flame Retardant (fiberglass reinforced epoxy laminates)
GPS	Global Positioning System
HEM	Hybrid Electric and Magnetic
HFSS	High Frequency Structure Simulator
IoT	Internet of Things
IEEE	Institute of Electrical and Electronics Engineers
JCPDS	Joint Committee on Powder Diffraction Standards
MIMO	Multi-Input Multi Output
MLMP	Multi-Layer Multi-Permittivity
MPA	Microstrip Patch Antenna
PCB	Printed Circuit Board
PBBS	$\text{PbO-B}_2\text{O}_3\text{-BaO-SiO}_2$
PPP	Probe with Plus Patch

PSP	Probe with Swastik Patch
PXP	Probe with XOR Patch
PVA	Polyvinyl Alcohol
$Q \times f$	Quality Factor multiplied by frequency
RDRA	Rectangular Dielectric Resonator Antenna
SCS	$\text{SrCuSi}_4\text{O}_{10}$
SEM	Scanning Electron Microscopy
SMA	Sub-miniature version A
TA	Thermal Analyser
TE	Transverse Electric
TEM	Transverse Electromagnetic
TM	Transverse Magnetic
WiMAX	Worldwide Interoperability for Microwave Access
WLAN	Wireless Local Area Network
XRD	X-Ray Diffraction
3D	Three dimensional

PREFACE

In wireless communication and radar systems, antenna is the only interfacing device attached to both the transmitter as well as the receiver. Wideband systems can provide high data rates, voice biometrics, multi-lingual communication, multiple communication channels, controlled data traffic and good range resolution due to availability of wide frequency spectrum. Thus, large impedance bandwidth is required for efficient wireless communication and radar systems. Dielectric resonator antenna (DRA) is one of the best options to achieve wide impedance bandwidth. An American physicist, R.D. Richtmyer theoretically predicted that a dielectric piece of suitable shape can function as a microwave resonator and he coined the term "dielectric resonator (DR)" in 1939. In the early 1980s, Stuart A. Long gave an introductory experimental investigation on the resonant cylindrical dielectric cavity antenna.

Now-a-days, DRAs are drawing great attention for radar and wireless communication due to their attractive advantages, such as large bandwidth, ease of excitation, high radiation efficiency, low phase noise, flexible feed arrangement, ease of integration with other active or passive microwave integrated circuit components, easily controlled characteristics and wide range of material dielectric constants. DRAs can be excited by different feeding techniques including coaxial or probe, microstrip line, slot coupling technique, coplanar waveguide and dielectric image guide. The conventional shapes of DRA: rectangular, cylindrical, hemispherical, and ring provide a typical bandwidth of around 10%, which may not be adequate for wideband applications. Bandwidth enhancement of a DRA, especially with a low profile design is a demanding task for the researchers. Different approaches are used to enhance the bandwidth of DRAs. Multi-element stacking is one of the approaches to enhance the bandwidth but overall antenna

volume is increased in this approach. Another approach includes the merging of a hybrid radiating mode with the DRA mode. Such merger of modes occurs in dielectric resonator on patch configuration and coplanar waveguide inductive slot embedded as a hybrid radiator along with the DRA. Although to achieve wideband impedance match, some special feeding mechanisms viz. L-shaped probe feed in cylindrical DRA and tall microstrip transmission line (TML) are used. Several DRA geometries, such as H-shaped, T-shaped, dumb-bell shaped DRAs, were analyzed for wideband applications. Material selection for the DRA also plays an important role in deciding the final antenna performance. For the DRA performance to be effective, both the aspects i.e. DRA design and the DRA material selection need to be essentially considered. It is possible to get good DRA performance using proper material with simple design instead of going for complex design with improper material selection.

The present state-of-the-art on dielectric resonator antennas (DRAs) using dielectric ceramic draw great attention of researcher working in the area of DRAs. The thesis would help these researchers in their endeavor to address the issues related to ceramic material design of DRAs. The thesis is broadly comprises of eight chapters.

Chapter 1 contains compact description about different types of dielectric resonator antennas (DRAs), excitation techniques, modes of excitation, radiation mechanism, bandwidth and gain enhancement techniques as well as reconfigurable DRAs. It gives brief idea about the parameters of ceramic dielectric materials affecting the performance of the DRAs as well as recent development in DRAs. It also deals with the discussion about the role of dielectric materials used for DRAs, mechanism of interaction of microwave with ceramic dielectric, parameters that effect the dielectric constant of ceramic materials used for DRAs. For future investigations, such studies will be useful for understanding the effect on the microwave device performance on the end user side.

Also, emphasis is placed on the low cost production and eco-friendly materials, which can be recycled further, keeping in view the environmental protection aspect. This review might provide a systematic guideline to researchers for design and development of novel DRAs.

Chapter 2 describes the objectives of the present investigation in detail. In the present investigation, it is aimed to synthesize and characterize Barium – Strontium Titanate (BST) (50Ba:50Sr) which was sintered using a few low melting glasses as sintering additives. Further, filleted rectangular DRA (F-RDRA) and cylindrical DRA (CDRA) are designed and fabricated using these materials and their input and radiation characteristics are studied through simulation and experimentation in X-/Ku- band(s).

Chapter 3 describes the experimental procedure used for the synthesis and characterization of materials, and for the design and fabrication of different DRAs. The solid state synthesis route has been used for the BST ceramic preparation. Two different glasses i.e. PBBS and BB glasses were prepared by melting in the glass melting furnace at 1323K and 1123K temperatures. After that the glass added BST ceramic was prepared using liquid phase sintering.

For the design and simulation study of DRAs, Ansys HFSS simulation software was used. The two different DRAs have been proposed i.e. F-RDRA and composite feed CDRA. The optimization of DRA dimensions have been done through parametric study in HFSS. The fabrication and measurement of proposed DRAs are also described in this chapter.

Chapter 4 describes the synthesis of novel $60\text{PbO}-20\text{B}_2\text{O}_3-5\text{BaO}-15\text{SiO}_2$ (PBBS) glass, which has been utilized as the sintering aid for $\text{Ba}_{0.5}\text{Sr}_{0.5}\text{TiO}_3$ (BST) ceramic. The effects of different amount of PBBS glass additions on the sintering temperature, phase, microstructural and dielectric properties of BST ceramic have been investigated

comprehensively. With 3-10 wt% of glass addition to the BST ceramic, the sintering temperature of BST significantly reduces by $> 300\text{K}$. BST with 10 wt% PBBS glass (BST-10P) shows the highest density with lowest sintering temperature as compared with all other compositions. XRD analysis has revealed that addition of PBBS glass has no effect on the crystal structure of BST. analysis of dielectric property has revealed that transition temperature increases with increase in glass concentration up to 5 wt% and then it starts decreasing by further increase of the glass concentration (>5 wt%). Transition temperature also shifts towards higher temperature side on increasing the frequency. Average dielectric constant values of glass added BST samples lie in the range 13.8 - 27.0 and thus these materials can be potentially useful for the design of microwave dielectric resonator antennas. The synthesized ceramic reduces the manufacturing cost and can be potentially useful for the miniaturized devices or components in the radio frequency/microwave range.

Chapter 5 deals with the design and development of filleted rectangular dielectric resonator antenna using 3wt% PBBS glass added BST (BST-3P) as a resonating segment for antenna. It BST-3P material average dielectric constant of 15, which is used for the design of proposed antenna under investigation in this chapter. The simulation studies of single segment rectangular DRA (SS-RDRA), double segment rectangular DRA (DS-RDRA) and filleted rectangular DRA (F-RDRA) were carried out using Ansys HFSS software at microwave frequencies and simulation results for input and / or radiation characteristics are compared. The proposed filleted RDRA (F-RDRA) was fabricated and measurements on it were performed. The simulation results for input and radiation characteristics of the proposed F-RDRA are compared with respective experimental results as well as with the respective results for conventional dual segment RDRA (DS-RDRA) and those reported in literature. The proposed F-RDRA provides widest

bandwidth with reasonable gain among all the RDRA's studied and those reported in literature. The proposed F-RDRA provides broadside radiation pattern with reasonably good realized gain over its operating frequency range. The proposed antennas can find potential application as primary feed for parabolic reflector in radar and satellite communication.

Chapter 6 describes the study the effects of B_2O_3 - Bi_2O_3 glass additive on phase, microstructure, sintering temperature and dielectric behavior of $Ba_{0.5}Sr_{0.5}TiO_3$ ceramic. The BB glass has been utilized as the sintering aid for BST ceramic preparation. Composition BST-5B shows the highest density at sintering temperature of 1223 K as compared with all other compositions. XRD analysis has revealed that addition of BB glass has no effect on the crystal structure of BST. Analysis of dielectric property has revealed that transition temperature increases with increase in glass concentration up to 5 wt% and then it starts decreasing by further increase of the glass concentration (>5 wt%). Dielectric constant of all glass added BST samples have been observed over the frequency range 8.5 - 12 GHz at room temperature with the highest value for BST-5B. Dielectric constant of glass added BST samples lie in the range 17 – 43.2 and thus these samples can be potentially useful for the design of microwave dielectric resonator antennas. The synthesized ceramic reduces the manufacturing cost and can be potentially useful for design of miniaturized devices or components in the RF/microwave range.

Chapter 7 presents the design and development of cylindrical dielectric resonator antenna using 3 wt% BB glass added BST (BST-3B) excited by novel composite feed. BST-3B ceramic has been used as dielectric resonator in the proposed single segment cylindrical DRA (SS-CDRA). A new simple composite feeding technique consisting of a probe

connected to XOR-shaped patch (PXP feed) has been proposed to obtain the monopole like radiation pattern from SS-CDRA. The simulation and experimental studies on the proposed antenna were performed in microwave frequency range and results obtained for the antenna characteristics have been compared. Simulation study on the antenna was carried out using Ansys HFSS software. The simulated and measured -10 dB reflection coefficient bandwidths for the proposed antenna have been determined to be 40.77 % (7.44 - 11.25 GHz) and 52.08 % (7.03 - 11.98 GHz), respectively. The near E-field distributions show the generation of distorted $TM_{01\delta}$ mode in the proposed CDRA. The proposed antenna has provided monopole like radiation patterns. The simulation and the experimental results of the proposed antenna have been found to be nearly in agreement with some deviation in the results especially for reflection coefficient-frequency characteristics which may be due to fabrication and measurement errors. The proposed antenna has also been found to provide the widest bandwidth when compared with other antennas producing monopole like radiation pattern reported in literature. The proposed CDRA may find potential application as an element in antenna array in radar and satellite communication. The benefits of the proposed antenna is in its simple design and simple feed layout for obtaining monopole like radiation characteristics. The composite feed employed here can be exploited for excitation of different DRAs using wide range of available dielectric materials, which can provide much flexibility to cover wide range of frequencies.

Chapter 8 presents the summarized conclusion of the present investigations made in the thesis on dielectric materials and dielectric resonator antenna. A table for comparison of properties of BST ceramic, PBBS and BB glass added BST ceramics are also given in this chapter. In the present study, emphasis has been given on lowering the sintering temperature of BST ceramic by liquid phase sintering. Two different types of low melting

temperature glasses (PBBS and BB) were prepared and added to the calcined powder of BST ceramic described in chapters 4 and 6, respectively. The results have shown that a small PBBS glass addition (BST-10P) lowers the sintering temperature by 375K giving good relative density of 90.2 %. Significant effect of PBBS glass has been observed on the microstructure of BST ceramic. Dielectric constant is almost stable with temperature and frequency for the PBBS glass added ceramic compositions.

A microstrip-fed aperture-coupled single segment RDRA (SS-RDRA), dual segment RDRA (DS-RDRA) and filleted RDRA (F-RDRA) have been investigated through simulation and/or experimentally (chapter 5). The -10 dB reflection coefficient-frequency plots for the three DRA configuration reveals that the maximum bandwidth is obtained for the filleted-RDRA configuration. The proposed F-RDRA provides widest bandwidth with reasonable gain among all the RDRA's studied and those reported in literature. Another antenna, CDRA with novel composite feed is described in Chapter 7. A table for comparison of antenna characteristics of these two proposed antenna configuration is given in this chapter. The scope of future work is also described in brief.